


5GHz 300Mbps 802.11a/n Outdoor Wireless Access Point



High Power Outdoor Wireless Coverage

PLANET has launched the latest high power outdoor wireless LAN solution. -- the WNAP-7350 300Mbps outdoor wireless AP. It provides **higher transmit power, better performance, wider coverage and stable connection** than standard outdoor wireless AP. As an IEEE 802.11a/n compliant wireless device, the WNAP-7350 is able to give stable and efficient wireless performance for long distance application. Being designed with IEEE 802.11n standard and 2T2R MIMO technology, the WNAP-7350 makes it possible to deliver six times faster data rate up to 300Mbps than the normal 802.11a wireless device. It also features adjustable output power up to 500mW to extend higher coverage in outdoor long range application.

Wi-Fi City

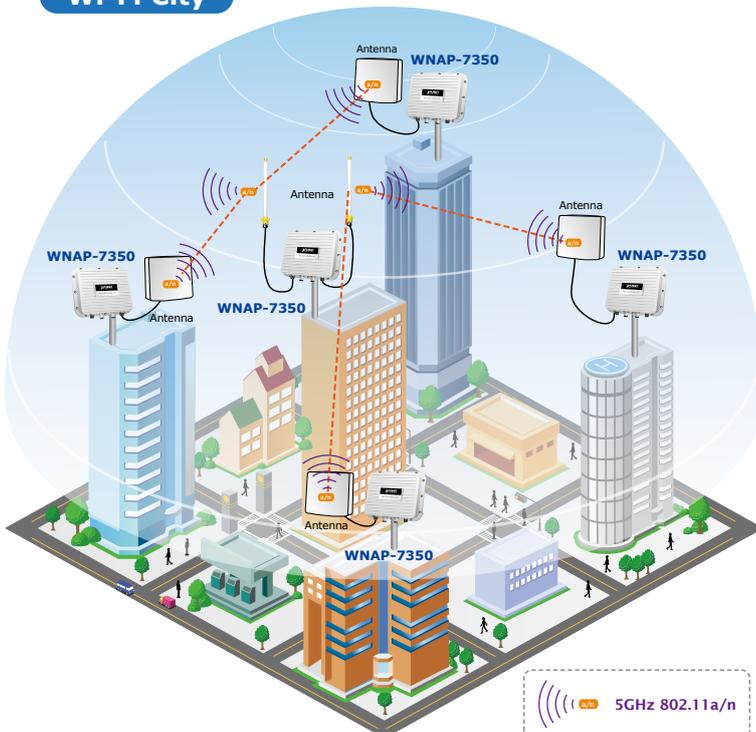

Industrial Compliant Wireless LAN & LAN

- Compliant with IEEE 802.11n wireless technology capable of up to 300Mbps data rate
- Backward compatible with 802.11a standard
- Equipped with 10/100Mbps RJ-45 ports for LAN and WAN, and auto MDI/ MDI-X

Fixed-network Broadband Router

- Supported connection types: Dynamic IP / Static IP / PPPoE / PPTP / L2TP / IPSec
- Supports Virtual Server and DMZ for various networking applications
- Supports DHCP Server, UPnP and Dynamic DNS

RF Interface Characteristics

- Two built-in N-type female antenna connectors
- High output power up to 500mW with multiple adjustable transmit power control

Outdoor Environmental Characteristics

- Aluminum Housing, IP67 Protection Grade
- IEEE 802.3af/at power over Ethernet design
- Operating temperature: -30~75 degrees C

Multiple Operation & Wireless Mode

- Multiple Operation Modes: Bridge, Gateway, WISP
- Multiple Wireless Modes: AP, Client CPE (WISP), WDS PtP, WDS PtMP, Repeater
- Supports Dual-SSID allowing users to access different networks through one single AP
- Supports WMM (Wi-Fi Multimedia)

Secure Network Connection

- Supports Software Wi-Fi Protected Setup (WPS)
- Advanced security: 64/128-bit WEP, WPA / WPA2, WPA-PSK / WPA2-PSK (TKIP/AES), and 802.1x authentication
- Supports NAT firewall features, with SPI function to protect against DoS attacks
- Supports IP / protocol-based access control and MAC filtering


Easy Installation & Management

- Web-based UI and Quick Setup Wizard for easy configuration
- Remote Management allows configuration from a remote site
- SNMP-based management interface
- System status monitoring includes DHCP Client, System Log

Multiple Operating and Wireless Modes

The WNAP-7350 supports multiple wireless communication connectivity (AP / Client CPE / WDS PtP / WDS PtMP / Repeater) allowing for various application requirements and thus it gives users more comprehensive experience when using the WNAP-7350. It helps users to easily build a wireless network and extend the wireless range of existing wireless network.

The WNAP-7350 also supports WISP mode, so CPE users could easily connect to Internet via WISP provider or connect to a wired network.

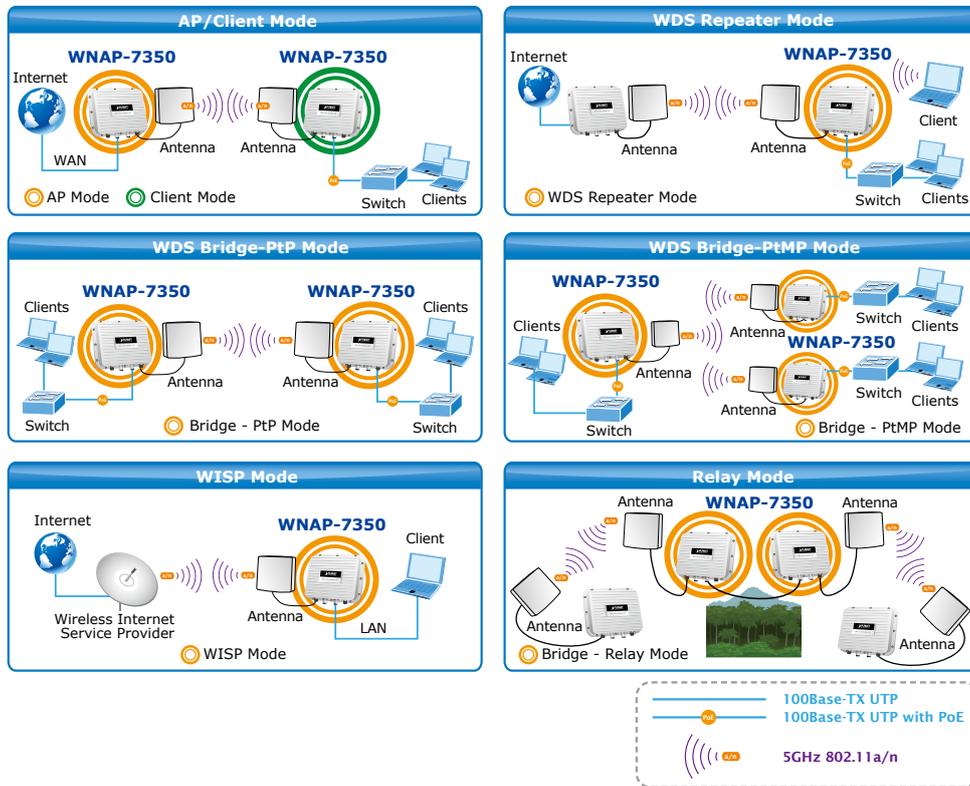

Advanced Security and Management

In aspect of security, besides 64/128-bit WEP encryption, the WNAP-7350 integrates WPA / WPA2, WPA-PSK / WPA2-PSK and 802.1x authority to secure and protect your wireless LAN. The wireless MAC filtering and SSID broadcast control consolidate the wireless network security and prevent unauthorized wireless connection. To fulfill enterprise and various applications demand, The WNAP-7350 enhances security and management features such as providing multiple SSID support.

Perfect Solution for Outdoor Environment

Compliant with IEEE 802.3af/at Power over Ethernet standard, the WNAP-7350 can be powered by PSE (Power Sourcing Equipment) via a single UTP cable. It thus reduces the needs of extra cables and dedicated electrical outlets on the wall, ceiling or any other place which is difficult to reach. Furthermore, the WNAP-7350 is also suitable to be integrated with PoE Solar Power System to offer farther wireless service in remote areas. It enables the wireless LAN deployment to become more flexible and worry-free from the power outlet locations.



Aluminum Housing, IP67 Protection



-30°C



75°C






Lightning Protection



Waterproof

Flexible Deployment with PoE Feature

Compliant with IEEE 802.3af/at Power over Ethernet standard, the WNAP-7350 can be powered by PSE (Power Sourcing Equipment) via a single UTP cable. It thus reduces the needs of extra cables and dedicated electrical outlets on the wall, ceiling or any other place that is difficult to reach. Furthermore, the WNAP-7350 is also suitable to be integrated with PoE Solar Power System to offer farther wireless service in remote areas. It enables the wireless LAN deployment to become more flexible and frees you from worry about power outlet locations.

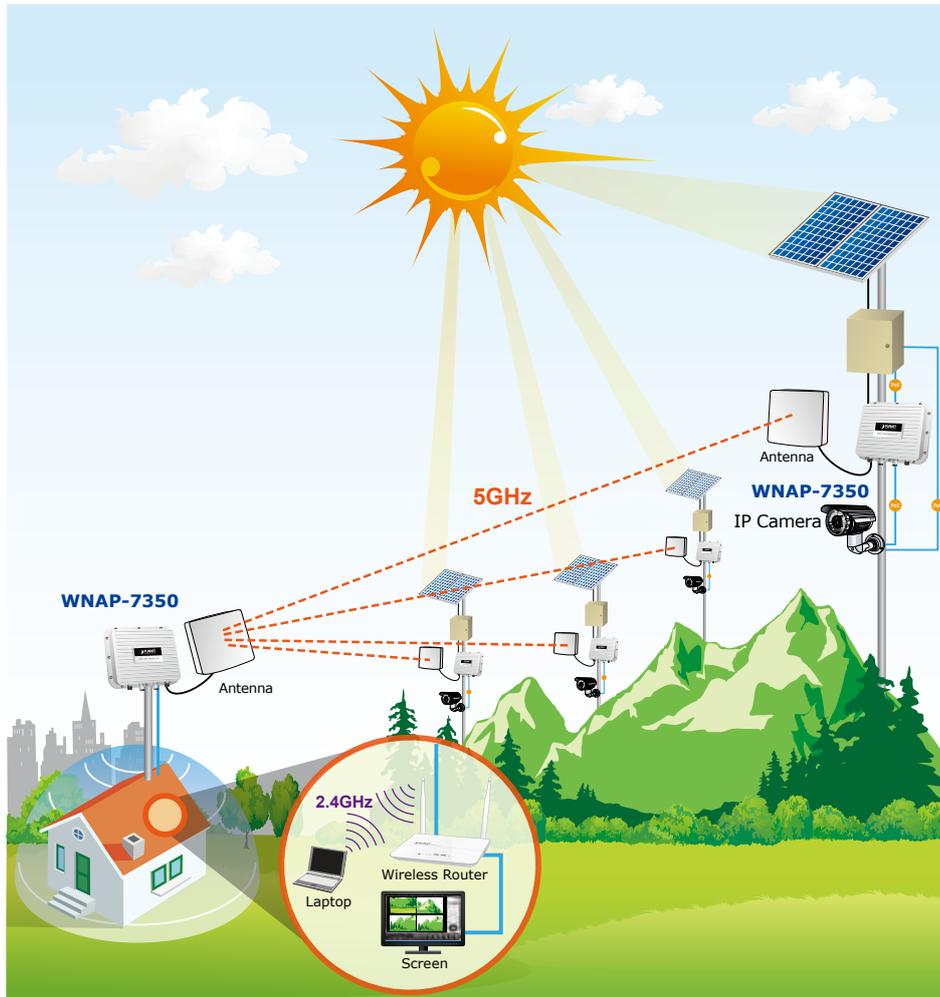

Easy Installation and Management

With user-friendly Web UI and step by step Setup Wizard, the WNAP-7350 is easy to install, even for users who never experience setting up a wireless network. Furthermore, with SNMP-based management interface, the WNAP-7350 is convenient to be managed and configured remotely.

Applications

Longer Distance Coverage between LAN Connections

The WNAP-7350 is a cost-effective outdoor wireless solution for widely open space applications. It is ideal for outdoor wireless connections between buildings.



With two built-in N-type antenna connectors, the WNAP-7350 brings higher coverage and longer distance of wireless connection. The WNAP-7350 provides high output power with multiple adjustable Tx controller, which allows CPE users to easily install and adjust the suitable value in appropriate locations. The WISP mode supported in the WNAP-7350 also enables CPE users to connect to Internet via local WISP provider conveniently.




**Sincerely suggest you match the same model in outdoor wireless bridge application for getting the best performance.

Specifications

Model	WNAP-7350			
Hardware Specifications				
Standard Support	IEEE 802.11a/n wireless LAN IEEE 802.11i wireless security IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3x flow control IEEE 802.3af/at power over Ethernet / PD			
Memory	32 Mbytes DDR SDRAM 8 Mbytes Flash			
Interface	Wireless IEEE 802.11a/n, 2T2R LAN: 1 x 10/100Base-TX, auto-MDI/MDIX, IEEE 802.3af/at PoE/PD port WAN: 1 x 10/100Base-TX, auto-MDI/MDIX, passive PoE/PSE port up to 7W			
Antenna	N-type female connectors x 2			
Wireless RF Specifications				
Wireless Technology	IEEE 802.11a IEEE 802.11n			
Data Rate	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9 and 6Mbps IEEE 802.11n (20MHz): up to 150Mbps IEEE 802.11n (40MHz): up to 300Mbps			
Media Access Control	CSMA / CA			
Modulation	Transmission / Emission Type: OFDM Data modulation type: OFDM with BPSK, QPSK, 16-QAM, 64-QAM			
Frequency Band	5.180GHz ~ 5.825GHz			
Operating Channel	5.180GHz	CH36	5.580GHz	CH116
	5.200GHz	CH40	5.600GHz	CH120
	5.220GHz	CH44	5.620GHz	CH124
	5.240GHz	CH48	5.640GHz	CH128
	5.260GHz	CH52	5.660GHz	CH132
	5.280GHz	CH56	5.680GHz	CH136
	5.300GHz	CH60	5.700GHz	CH140
	5.320GHz	CH64	5.745GHz	CH149
	5.500GHz	CH100	5.765GHz	CH153
	5.520GHz	CH104	5.785GHz	CH157
	5.540GHz	CH108	5.805GHz	CH161
	5.560GHz	CH112	5.825GHz	CH165
	*The above 24 channels are defined in theory. The actual application will vary depending on the regulation in different regions and countries.			
RF Output Power	IEEE 802.11a: 27 ± 1dBm IEEE 802.11n: 24 ± 1dBm			
Receiver Sensitivity	IEEE 802.11a: -91dBm IEEE 802.11n: -92dBm			
Output Power Control	3~27dBm			
Software Features				
LAN	Built-in DHCP server supports static IP address distributing Supports 802.1d STP (Spanning Tree)			
WAN	<ul style="list-style-type: none"> ■ Static IP ■ Dynamic IP ■ PPPoE ■ PPTP ■ L2TP ■ IPSec 			
Operating Mode	<ul style="list-style-type: none"> ■ Bridge ■ Gateway ■ WISP 			
Firewall	NAT firewall with SPI (Stateful Packet Inspection) Built-in NAT server supports Virtual Server and DMZ Built-in firewall with Port / IP address / MAC / URL filtering			

Wireless Mode	<ul style="list-style-type: none"> ■ AP ■ Client ■ WDS PTP ■ WDS PTMP ■ WDS Repeater (AP+WDS)
Channel Width	20MHz / 40MHz
Wireless Isolation	Enables it to isolate each connected wireless client from communicating with each other mutually.
Encryption Type	64/128-bits WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, 802.1X
Wireless Security	Provides wireless LAN ACL (Access Control List) filtering
	Wireless MAC address filtering
	Supports WPS (WIFI Protected Setup)
	Enable / Disable SSID Broadcast
Multiple SSID	Up to 2
Max. Wireless Client	40
Max. WDS AP	8
Max. Wired Client	60
WMM	Supports Wi-Fi Multimedia
QoS	Supports Quality of Service for bandwidth control
NTP	Network Time Management
Management	Web UI, DHCP Client, Configuration Backup & Restore, Dynamic DNS, SNMP
Diagnostic tool	System Log, Ping Watchdog
Mechanical & Power	
IP Rate	IP67
Material	Aluminum
Dimensions (W x D x H)	269 x 80 x 239mm
Weight	2.4kg
Installation	Pole mounting or wall mounting
Power Requirements	AP: IEEE 802.3af/at PoE / 48VDC input (PoE Injector included) PoE Injector: 100~240VAC
Power Consumption	7.68W
Environment & Certification	
Operating Temperature	-30~75 degrees C
Operating Humidity	10~95% non-condensing
Regulatory	CE / RoHS
Accessory	
Standard Accessories	<ul style="list-style-type: none"> ■ 48VDC 802.3af PoE injector & power cord x 1 ■ Mounting kit x 1 ■ Waterproof RJ-45 connector kit x 2 ■ Quick Installation Guide x 1 ■ CD (User's Manual, Quick Installation Guide) x 1

Interfaces

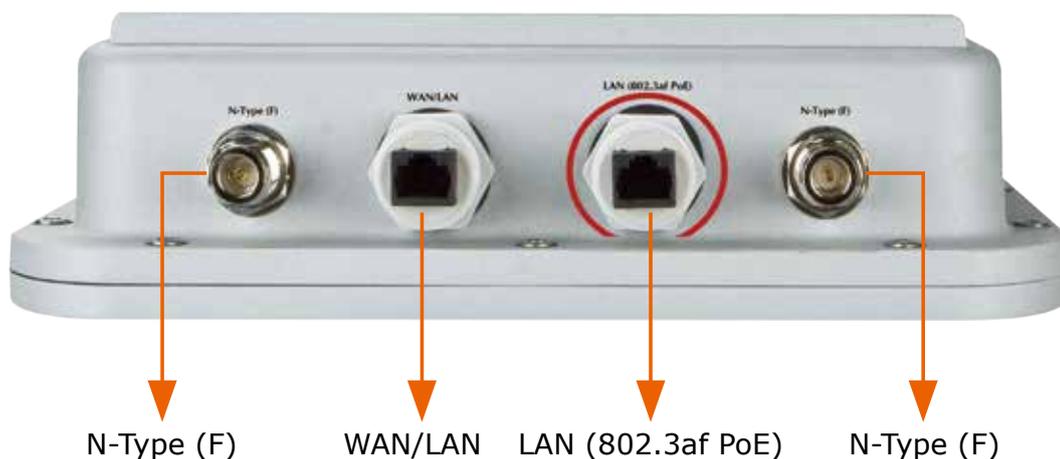

Ordering Information

WNAP-7350	5GHz 300Mbps 802.11a/n Outdoor Wireless Access Point
-----------	--

Accessories

CB-STP-25	25-meters STP Cat5 Cable
ELA-100	Ethernet Lightning Arrest Box
ANT-OM10A	5GHz 10dBi Omni-Directional Antenna
ANT-FP15AD	5GHz 15dBi Flat Panel Dual Polarization Directional Antenna
ANT-FP18A	5GHz 18dBi Flat Panel Directional Antenna
ANT-FP23A	5GHz 23dBi Flat Panel Directional Antenna
ANT-SE17A	5GHz 16.5dBi Sector Antenna
ANT-SE21A	5GHz 21dBi Sector Antenna
WL-NM-0.6	0.6-meter N-male (male pin) to N-male (male pin) Cable
WL-LTNA	2.4/5GHz Lightning Arrester (N-male to N-female)

Related PoE Products

IGS-10020HPT	Industrial 8-Port 10/100/1000T 802.3at PoE + 2-Port 100/1000X SFP Managed Switch with Wide Operating Temperature
IGS-10020PT	Industrial 8-Port 10/100/1000T 802.3af PoE + 2-Port 100/1000X SFP Managed Switch with Wide Operating Temperature
ISW-1022MPT	8-Port 10/100Mbps + 2-Port Gigabit TP/SFP Combo PoE Managed Industrial Switch with Wide Operating Temperature
ISW-514PTF	4-Port 10/100Mbps with PoE + 1-Port 100FX Industrial Ethernet Switch – Wide Temperature
ISW-804PT-M12	Industrial IP67 Rated 8-Port 10/100Mbps M12 Fast Ethernet PoE Switch with Wide Operating Temperature
IVC-2004PT	4-Port 10/100Base-TX with PoE + 1-Port BNC / RJ-11 Industrial Ethernet Extender
IPOE-162	Industrial IEEE 802.3at Gigabit High Power over Ethernet Injector (Mid-Span)
FTP-802	100Base-FX to 10/100Base-TX PoE Media Converter
SGSW-24040P	24-Port Gigabit PoE Managed Stackable Switch / 220W
POE-E201	IEEE 802.3at Power over Gigabit Ethernet Extender

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2014 PLANET Technology Corp. All rights reserved.

WNAP-7350v3